


## 12G, 6G, 3G, 1.5G SDI to Fiber Optic Transmitter

- Supports 12G, 6G, 3G and 1.5G SDI video inputs
- 3Gbit Level A and Level B (support for all formats)
- Auto reclocking 1.5Gbit / 3Gbit / 6Gbit / 12Gbit
- Error free optical transmission
- Reclocked SDI loop out connection
- LC and ST connection variants
- Singlemode fiber connection
- Up to 10km (6.2 miles) @ 12Gbit/s (singlemode) with OTX 1410 LC and ST variant
- Up to 40km (24.8 miles) @ 12Gbit/s (singlemode) with OTX 1410 LC-40 variant
- Hot swappable and hot pluggable



OTX 1410 LC Version Shown

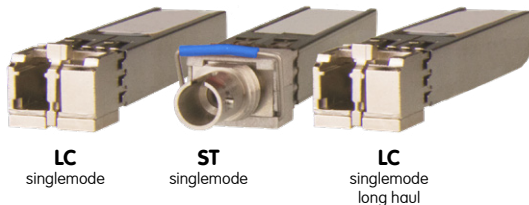

Using the same basic module we provide three versions suitable for LC or ST singlemode fiber connections, as well as a version for long haul 40km fiber transmissions. Each version has a different SFP installed. See Model# in the Technical Specifications table for more information.

The OTX 1410 is a compact SDI to fiber optic transmitter designed to combat the restrictions involved with the distribution of uncompressed, high bandwidth, broadcast quality video signals over long distances.


When paired with the fiber optic to SDI receiver (e.g. yellobrik ORX 1400) you have a very cost-effective optical transmission / receiver system for signals up to 12Gbit/s (4096x2160 @ 60Hz), while preserving full uncompressed quality.

Operation of the OTX 1410 is fully automatic. The SDI video format is automatically detected, reclocked and then transmitted over the fiber optic connection. A reclocked electrical SDI output is also provided.


The OTX 1410 supports 12G, 6G, 3G and 1.5G SDI video standards and is available in LC, LC-40 and ST variants.

### Fiber Adapter Options (singlemode)

These adapter kits allow the use of ST or SC fiber connections on the module. SMF 0.5m (19.6") tail introduces less than 0.25dB attenuation.



Model# **LC/SC SIM**  
LC/PC to SC/PC Adapter



Model# **LC/ST SIM**  
LC/PC to ST/SC Adapter

### Technical Specifications

<b>SDI Input</b>	1 x SDI video input and 1 x SDI reclocked loop output 75 Ohm BNC connectors
	SMPTE 2082-1, SMPTE 2081-1, SMPTE 424M, SMPTE 292M
	Multi-standard operation from 1.5Gbit/s to 12Gbit/s
	Multirate reclocking: 1.5G - 3G - 6G - 12G
	Automatic cable EQ 260m @ 1.5Gbit/s, 150m @ 3Gbit/s (Belden 1694A cable) 90m @ 6Gbit/s, 80m @ 12Gbit/s (Belden 4794R cable)
<b>SFP Options</b>	1 x fiber optic output using LC or ST singlemode (SM) connection ( Module variants are named LC and ST for 10km, LC-40 for 40km )
	SMPTE 297M - 2006
	Wavelength 1310nm, typical Optical power -3dBm
	TX active LED on side of module
	Max. distance ~10km (6.2 miles) @ 12Gbit/s (SM) with OTX 1410 LC / ST ~40km (24.8 miles) @ 12Gbit/s (SM) with OTX 1410 LC-40
<b>Power</b>	+12VDC @ 2.2W nominal - (supports 7 - 24VDC input range)
<b>Physical</b>	Size: 140mm x 42mm x 22mm (5.51" x 1.65" x 0.86") including connectors Weight: 125g (4.4oz)
<b>Ambient</b>	5 - 40°C (41 - 104°F) 90% Humidity (non condensing)
<b>Model #</b>	OTX 1410 LC - (EAN# 4250479324756) OTX 1410 LC-40 - (EAN# 4250479328495) OTX 1410 ST - (EAN# 4250479327641)
<b>Includes</b>	Module, SPF module, AC power supply

### Power Adapter Options

The kit **INCLUDES** AC power supplies. The power adapters below are optional.



**P-TAP 1000**  
Use with a standard battery P-TAP power source.



**XLR 1000**  
Use with a standard 4 pin XLR camera battery power source.

Specifications subject to change